


GROOVE NUMBER	ROPE INCHES	TRAVEL mm	FLEET INCHES	DISTANCE mm
1	—	—	—	—
2	—	—	—	—
3	—	—	—	—
4	14.5	368	4.9	124
5	29.0	737	9.8	248
6	43.5	1106	14.7	371
7	58.0	1475	19.5	495
8	72.6	1844	24.4	619
9	87.1	2213	29.3	742
10	101.6	2582	34.1	866
11	116.1	2950	39.0	990
12	130.6	3319	43.9	1113
13	145.2	3688	48.7	1237
14	159.7	4057	53.6	1361
15	174.2	4426	58.5	1484
16	188.7	4795	63.3	1608
17	203.3	5164	68.2	1732
18	217.8	5532	73.1	1855
19	232.3	5901	77.9	1979
20	246.8	6270	82.8	2103
21	261.4	6639	87.7	2226
22	275.9	7008	92.5	2350
23	290.4	7377	97.4	2474
24	304.9	7746	102.3	2597
25	319.4	8114	107.1	2721
26	334.0	8483	112.0	2844
27	348.5	8852	116.9	2968
28	363.0	9221	121.8	3092
29	377.5	9590	126.6	3215
30	392.0	9959	131.5	3339
31	406.6	10328	136.4	3463
32	421.1	10696	141.2	3586
33	435.6	11065	146.1	3710
34	450.1	11434	151.0	3834
35	464.7	11803	155.8	3957
36	479.2	12172	160.7	4081
37	493.7	12541	165.6	4205
38	508.2	12910	170.4	4328
39	522.7	13278	175.3	4452
40	537.3	13647	180.2	4576
41	551.8	14016	185.0	4699
42	566.3	14385	189.9	4823
43	580.0	14754	194.8	4947
44	595.4	15123	199.6	5070
45	609.9	15492	204.5	5194
46	624.4	15860	209.4	5318
47	638.9	16229	214.2	5441
48	653.4	16598	219.1	5565
49	668.0	16967	224.0	5688
50	682.5	17336	228.9	5812
51	697.0	17705	233.7	5936
52	711.5	18074	238.6	6059
53	726.1	18442	243.5	6183
54	740.6	18811	248.3	6307
55	755.1	19180	253.2	6430
56	769.6	19549	258.1	6554
57	784.1	19918	262.9	6678
58	798.7	20287	267.8	6801
59	813.2	20656	272.7	6925
60	827.7	21024	277.5	7049
61	842.2	21393	282.4	7172
62	856.7	21762	287.3	7296
63	871.3	22131	292.1	7420
64	885.8	22500	297.0	7543
65	900.3	22869	301.9	7667
66	914.8	23238	306.7	7791
67	929.4	23606	311.6	7914
68	943.9	23975	316.5	8038
69	958.4	24344	321.3	8161

REV NUM	DATE	REVISION NOTICE	REVISION DESCRIPTION	BY	APRD

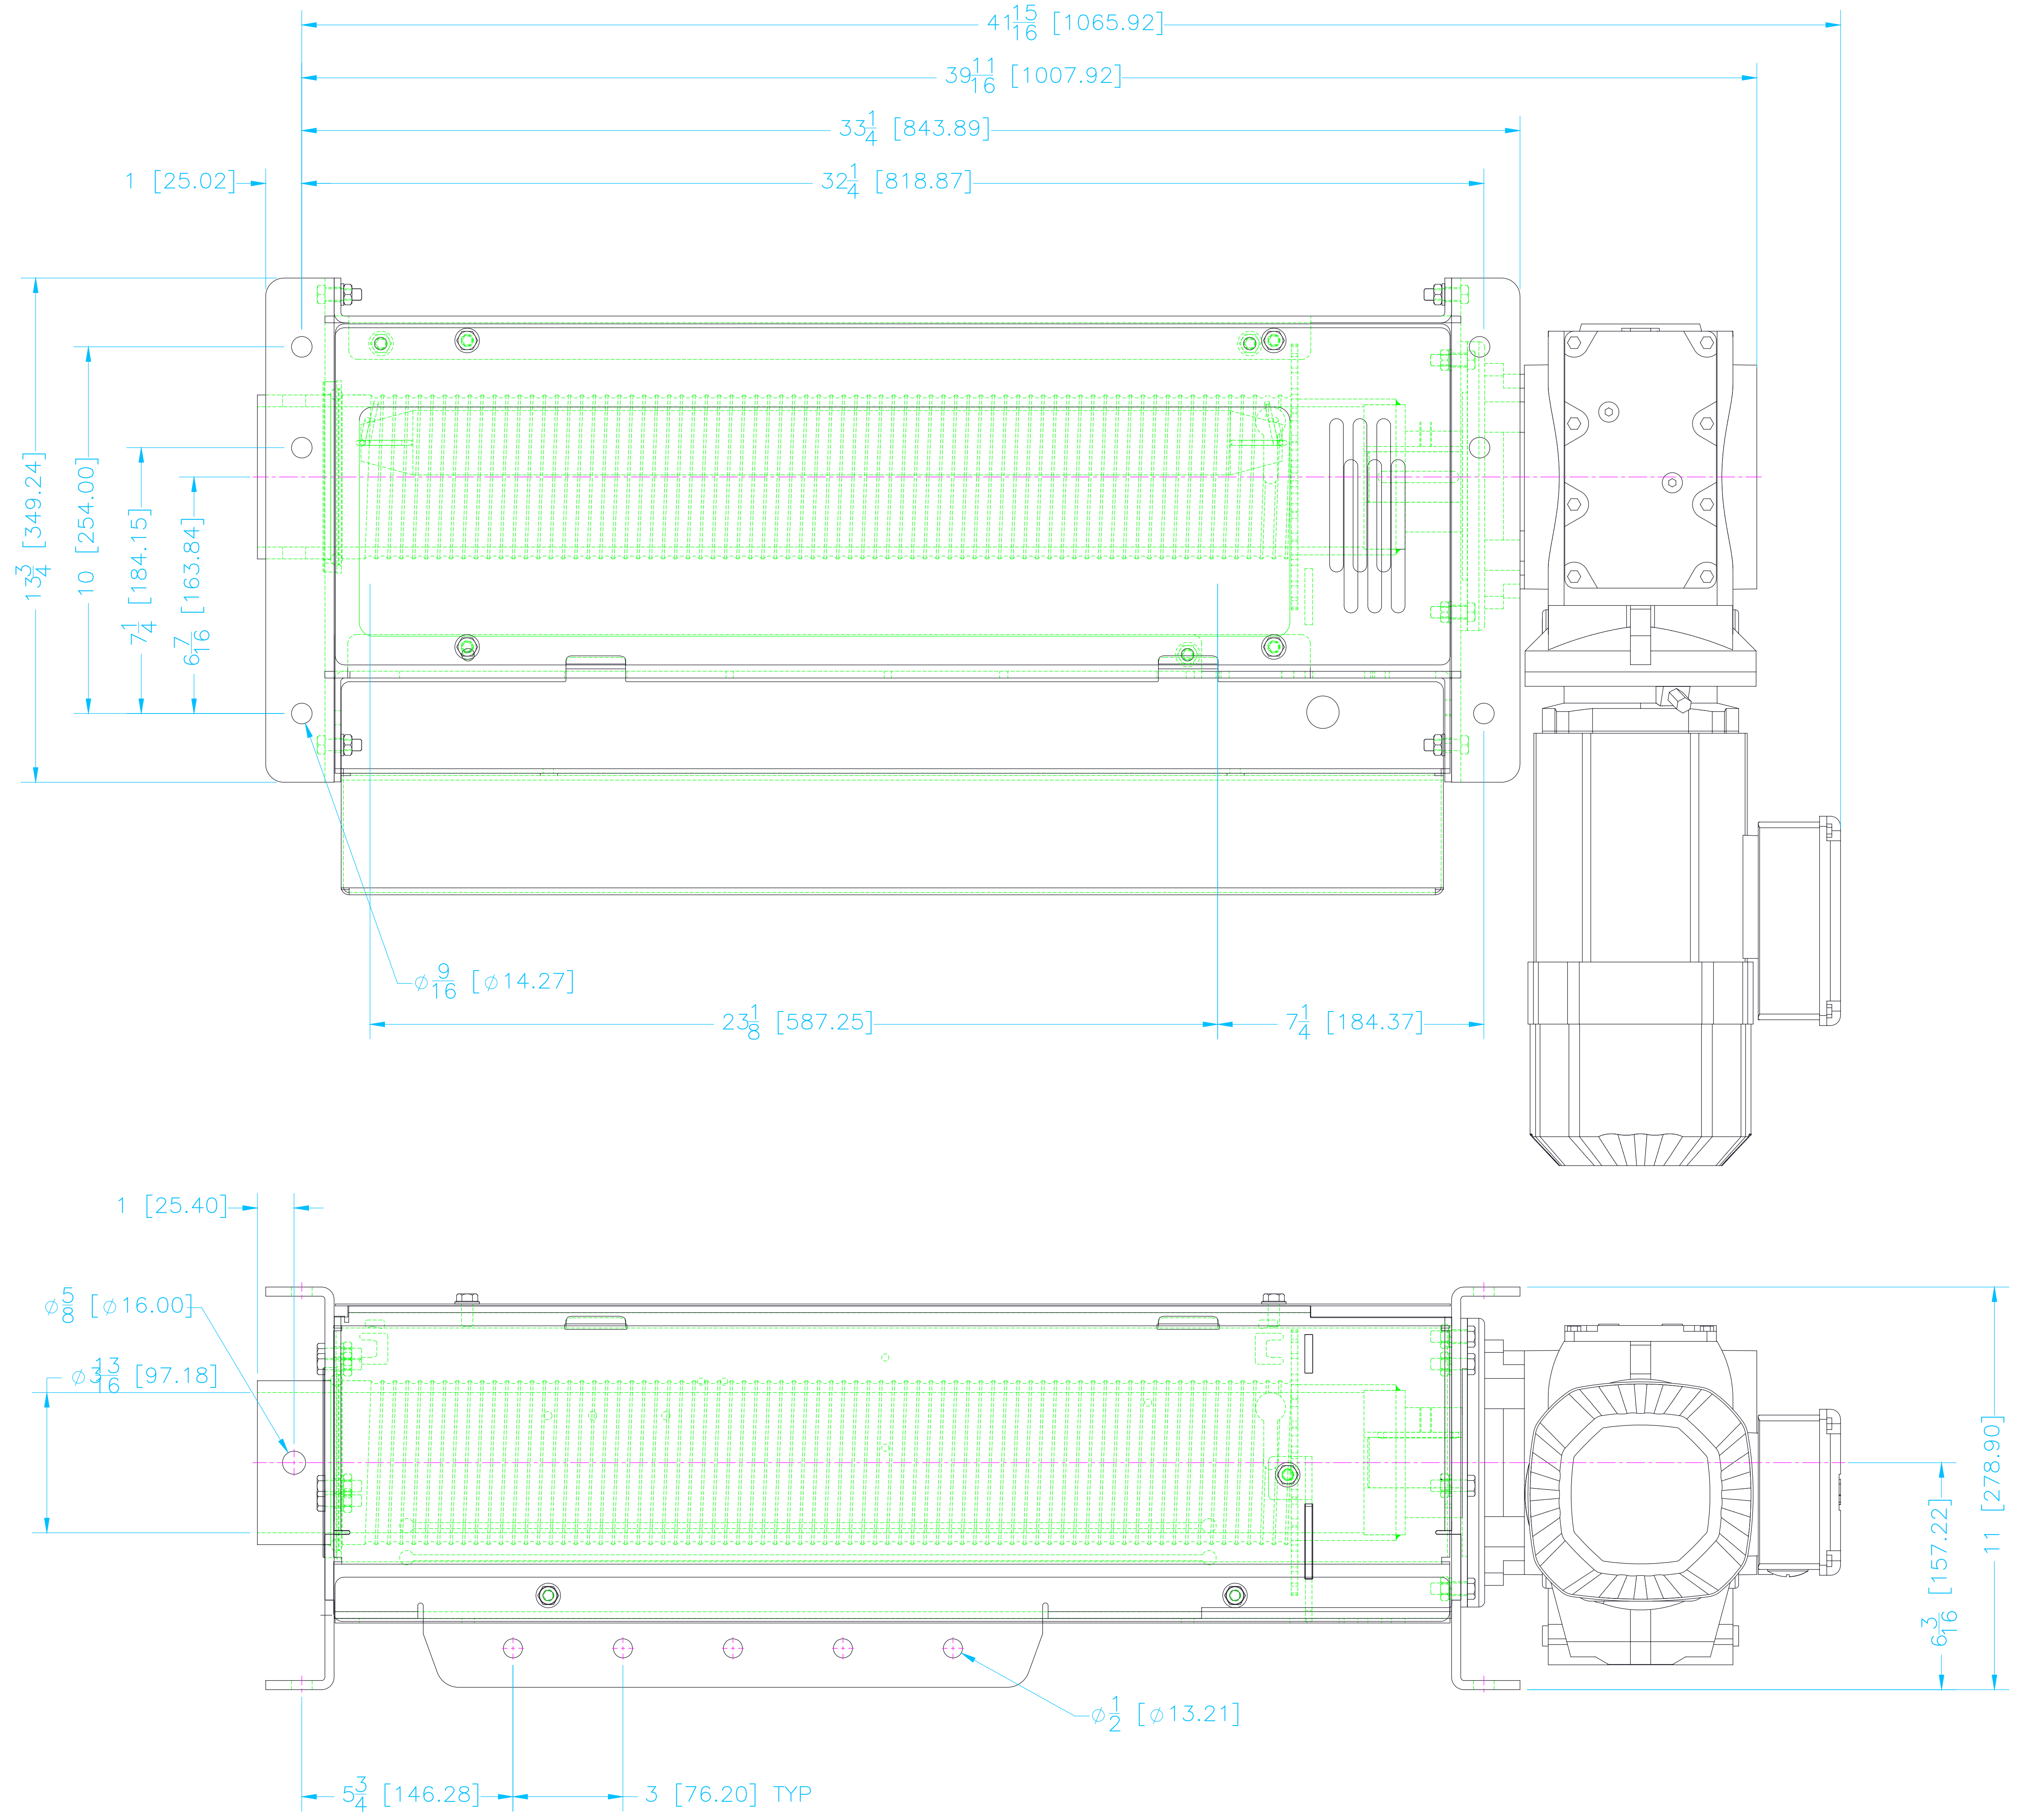

SPECIFICATIONS:
 MAXIMUM ROPE PULL— 1900 LBS [862 kg] AT 11 FPM [3.35 m/m]
 ROPE— 5/16 INCH [7.96 mm] 7 X 19 AIRCRAFT CABLE
 DRUM CAPACITY— 85 FEET [25.9 m] 1ST LAYER
 DUTY CYCLE— 4 MINUTES RUN TIME, 20 MINUTES OFF TIME
 SELF WEIGHT = 285 LBS [129 kg]

ITEM	PART NUMBER	QTY	DESCRIPTION	TOTAL QTY	UOM
<p>THIS DOCUMENT IS THE PROPERTY OF TORK WINCH INC., AND SHALL NOT BE USED, COPIED OR TRANSFERRED TO ANY OTHER DOCUMENTS (WHOLLY OR PARTIALLY) WITHOUT PERMISSION OF TORK WINCH INC.</p> <p>DO NOT SCALE DRAWING</p> <p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MM</p> <p>—TOLERANCES— ANGULAR ± 0.5° DECIMAL ± .02 FRACTIONAL ± 1/32 GENERAL ± 1/16 CUTTING ± 1/16 FORMING ± 1/16 WELDING ± 1/16</p> <p>UNSPECIFIED WELDS PER 30008800</p>					
			QUOTE NUMBER ORDER NUMBER UNCHECKED MACHINING SHAFT RADI MACHINING UNCHECKED MACHINING		
			DRAWN BY WJW DRAWN DATE 11MAR14 CHECKED APPROVED UOM EA WEIGHT (LBS) N/A		
			APPROVAL DWG— MW4600 X 85 FT DERIVED FROM 38000587-0 SCALE 1/4	SHT NO 1 SHT OF 1	C
<p style="text-align: center; font-size: 24pt; font-weight: bold;">TORK WINCH</p>				DRAWING NO A8000011	REV NUM 0