

TECHNICAL SPECIFICATIONS

- Supply Voltage
- Safe Working Load
- Load Type
- Travel
- Output Speed
- Supply Voltage
- Motor
- Full Load Amperage
- Duty Cycle
- Gear Reduction
- Limit Switches
- Braking
- Directional Control
- Control Voltage
- Weight (As Shipped)
- Controls

TW 2100 CURTAIN WINCH

120/1/60	240/1/60	
2100 in lbs.		
Lifting of curtains and batting cages.		
85 turns of drive pipe are available between the upper and lower limit switch positions.		
17.2 RPM.		
120 V, 1 phase, 60 Hz. 30A fuse or circuit breaker.		
1 HP		
T.B.D.	T.B.D.	T.B.D.
Continuous.		
Enclosed, oil-filled, single stage worm gear reducer with 100:1 reduction ratio.		
Fully adjustable upper and lower limit switches.		
Self-locking worm gear reduction and DC injection braking.		
Three position key switch (K-SK13710). Wireless options available.		
24 VDC.		
75 lbs		
VFD - Variable Frequency Drive		


WARNING

Not to be used for lifting people.

For indoor use only.

Not to be used for lifting things over people without use of a safety locking device or an automatic fall arrest system.

Specifications subject to change without notice.

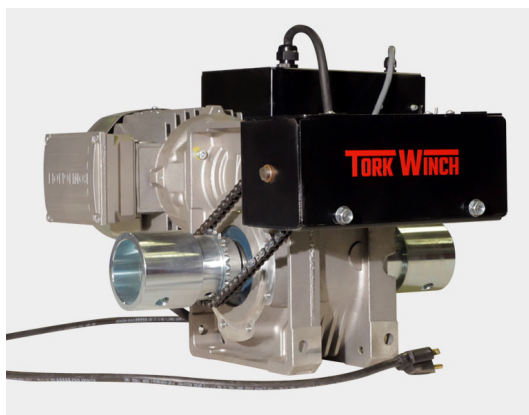

Call to speak with an expert:

1-866-829-4411

or visit us online:

TORKWINCH.COM