

TECHNICAL SPECIFICATIONS

Safe Working Load

Load Type

Rope Type

Rope Travel

Rope Speed

Input Voltage

Control Voltage

Duty Cycle

Gear Reduction

Rope Drum

Braking

Limit Switches

MW 4600 MAT WINCH

Designed to lift a vertical weight of 1900 lbs / 862 kg.

Vertical Lifting

$\frac{5}{16}$ " 7 x 19 aircraft included with winch.

85 ft / 25.9 meters on one layer.

11 ft per minute / 3.35 meters per minute.

240/3/60 standard. (120/1/60 or 480/3/60 available).

24 V DC.




Continuous.

Enclosed, oil-filled, single stage worm gear reducer.

Grooved for accurate winding. Supported by large diameter ball bearings, and with positive locking rope anchor.

Worm gearing plus brake motor for double safety brake mechanism.

Fully adjustable upper and lower limit switches.

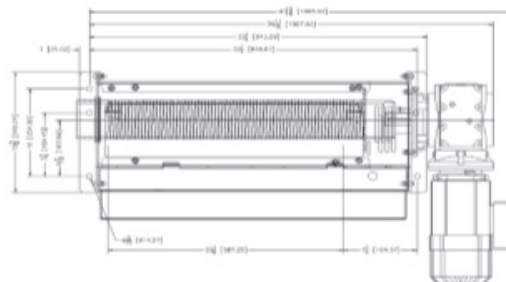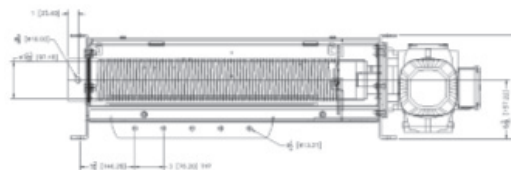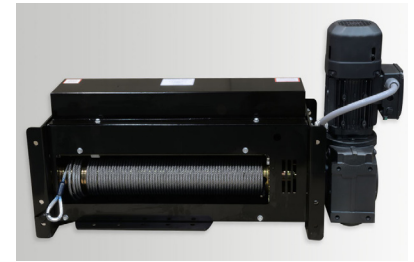

WARNING

Not to be used for lifting people.

For indoor use only.

Specifications subject to change without notice.

Call to speak with an expert:

1-866-829-4411

or visit us online:

TORKWINCH.COM